

506

Pressure transmitter for
refrigeration technology
Relative up to 60 bar



EDITION 07/2004

HUBA-REGISTERED TRADE MARK

 **Huba Control**

FOR FINE PRESSURE AND FLOW MEASUREMENT




EDITION 07/2004

Technical overview

The pressure transmitter of type series 506 with proved ceramic technology, features calibrated and amplified sensor signals which are available as standardized current outputs.

Specially developed for use in the industrial refrigeration technology.

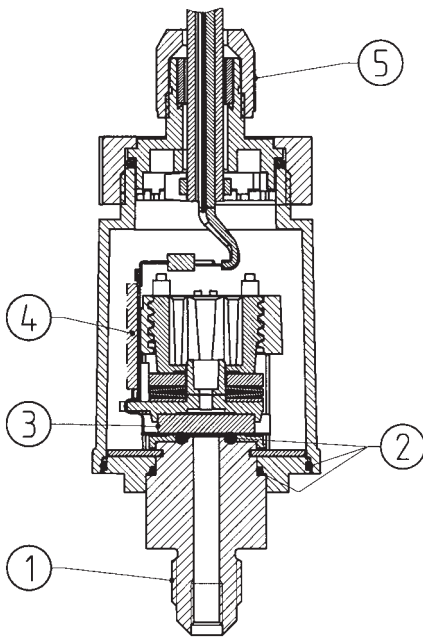

Legend to cross-section drawing

- 1 Connection Fitting
- 2 Seals
- 3 Ceramic element
- 4 Hybrid electronics
- 5 Cable joint PG7

Pressure ranges

Relative pressure/Gage (measurement of pressure relative to ambient pressure).
Lowest pressure range 7 bar fs

Overload

2x measuring range (fs)
(40 ... 60 bar max. 80 bar)

Rupture pressure

3x measuring range (fs)
(40 - 60 bar max. 90 bar)

Accuracy

Total of linearity, hysteresis and repeatability
< +/- 0.5 % fs (> 10 - 60 bar)
< +/- 1.0 % fs (7 - 10 bar)

Adjustment accuracy zero point and full scale (repeatable, stable)

0 - 5 V	± 50 mV
1 - 6 V	± 50 mV
0 - 10 V	± 100 mV
4 - 20 mA	± 0.16 mA
10 - 90 %	± 1%

Housing material

Cover Pa 6

Materials in contact with the medium

Ceramic/Stainless steel 1.4305 (AISI 303)

Sealing material: CR

Temperature influences

Medium and ambient temperature
-40 °C to +80 °C

TC zero point 10 to 60 bar
< +/- 0.04 % fs/K
7 - 10 bar < +/- 0.06 % fs/K

TC sensitivity
typically < +/- 0.015 % fs/K
7 - 10 bar < +/- 0.02 % fs/K typ.

Load cycle

< 50 Hz

Dynamic response

Suitable for static and dynamic measurements.
Response time < 5 ms

Pressure connections

Inside thread	7/16-20 UNF
Schrader	
Outside thread	7/16-20 UNF
Outside thread	1/4 - 18 NPT

Weight

Inside thread	50 grams
Outside thread	70 grams

Installation arrangement

Unrestricted

Signal Power supply

• 0 - 5 V	11 - 33 VDC	3-wire cable
• 1 - 6 V	11 - 33 VDC	3-wire cable
• 0 - 10 V	18 - 33 VDC	3-wire cable
• 4 - 20 mA	11 - 33 VDC	2-wire cable
• 10 - 90%	4.5 - 6.0 VDC	3-wire cable ratiometric

• Short circuit-proof and protected against polarity reversal. Each connection against other with max. +/- supply voltage.

Load

0 - 5 V	> 10 kOhm/<100 nF
1 - 6 V	> 10 kOhm/<100 nF
0 - 10 V	> 10 kOhm/<100 nF
4 - 20 mA	$\leq \frac{\text{supply voltage} - 11 \text{ V}}{0.02 \text{ A}}$ [Ohm]
10 - 90%	> 10 kOhm/<100 nF

Current consumption

With max. signal output:

0 - 5 V	< 2 mA
1 - 6 V	< 2 mA
0 - 10 V	< 3 mA
4 - 20 mA	< 20 mA
10 - 90%	< 2 mA

Electrical connections/protection class


Cable 1.5 meters, IP 65
Connector DIN 43650-A, IP 65
Connector industrial standard, IP 65

Calibration by customer

Calibrated in the factory.

The distinct advantages

- Compact construction
- By automatic largescale manufacture ideal price/performance ratio
- Robust ceramic-sensor technology
- High resistance to extreme temperatures
- No mechanical aging
- No mechanical creepage

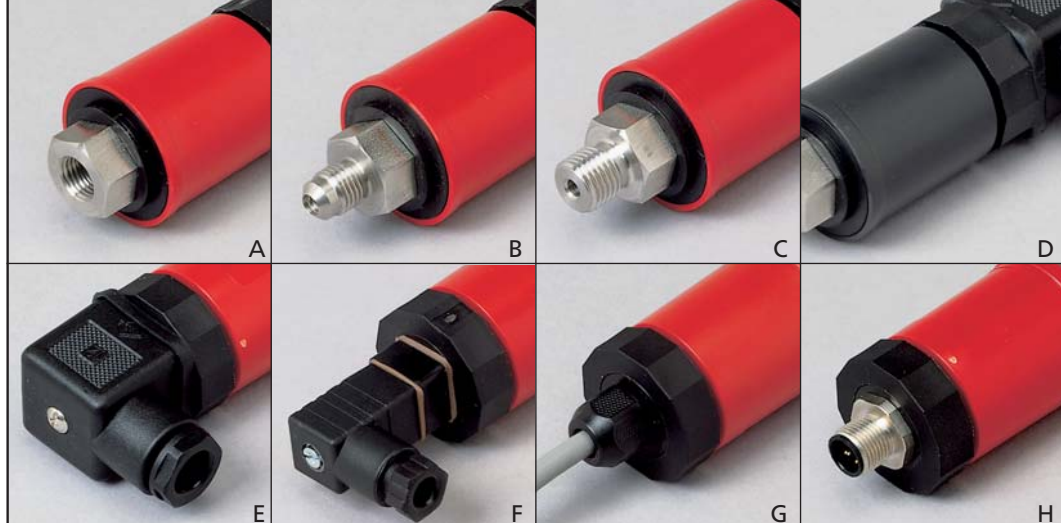

- A – Inside thread 7/16-20 UNF Schrader
- B – Outside thread 7/16-20 UNF
- C – Outside thread 1/4 - 18 NPT
- D – Storage version cover black
- E – Female connector DIN 43650-A
- F – Female connector industrial standard
- G – Electrical connection with PG 7
- H – Connector M12x1 (on request)

Versions

Order code selection table

EDITION 07/2004

506

		X	X	X	X	X	X	X	X	X	X	X	X
Relative pressure / Gage													
			9										
Pressure range	Customer side (- 1 ... + 60 bar) (min. 7 bar FS)	X	X										
Sealing material¹	CR			A									
Calibration	Factory calibrated				0								
Outputs and power supply	0 – 5 V 11.0 – 33.0 VDC 3-wire cable								1				
	1 – 6 V 11.0 – 33.0 VDC 3-wire cable								6				
	0 – 10 V 18.0 – 33.0 VDC 3-wire cable								2				
	4 – 20 mA 11.0 – 33.0 VDC 2-wire cable								3				
	ratiometric (10-90%) 4.5 – 6.0 VDC 3-wire cable								4				
Electrical connections²	Cable, 1.5 meters (protection standard IP 65)									0			
	Connector DIN 43650-A (protection standard IP 65)									1			
	Connector industrial standard (protection standard IP 65)									2			
Pressure connections³	Inside thread 7/16-20 UNF Schrader											0	
	Outside thread 7/16-20 UNF											2	
	Outsidethread 1/4 - 18 NPT											3	
Housing materials	Stainless steel 1.4305 (AISI 303)												1
	Stainless steel 1.4305 (AISI 303) with pressure tip orifice												2
Pressure range	Indicate W and mention range on order (Must)												W


Accessories	Female connector DIN 43650-A with seal (IP 65 when installed and latched)									1	0	3	5	1	0
	Female connector (industrial standard) with seal (IP 65 when installed and latched)									1	0	4	2	4	4

Packaging	Mention on order:	<ul style="list-style-type: none"> • single packaging • single packaging with DIN-connector order-no 103510 or Connector industrial standard order-no 104244 	<ul style="list-style-type: none"> • multiple packaging (25 pcs) • multiple packaging (25 pcs) DIN-connector order-no 103510 or Connector industrial standard order-no 104244 enclosed separatly
------------------	-------------------	--	--

Storage versions according separate specification.

Order example: specifications of customer: 506.9XXA02121W - 0,5 ... 7 bar turns to factory number: 506.930A02121W - 0,5 ... 7 bar

¹ According to ISO standard R 1629, other sealing materials on request.
² Without female connector.
³ Other connections and materials on request.

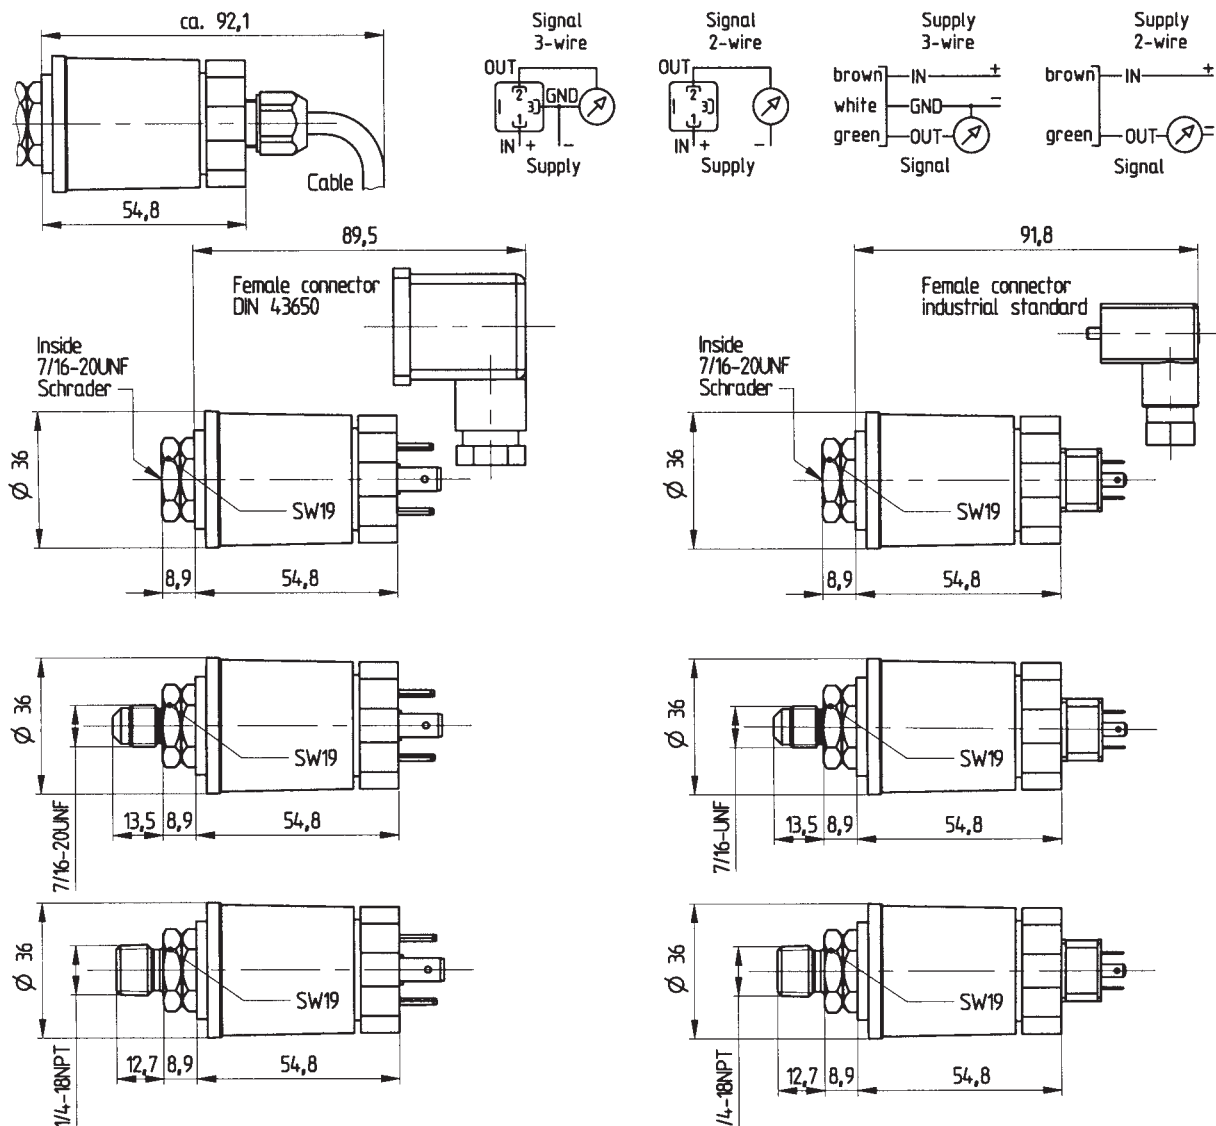

Electromagnetic compatibility:
 CE conformity to EC directive 89/336 EEC (EMC) by application of harmonized standards EN 61000-6-1 and EN 61000-6-3.

Type of interference/Interference susceptibility	Test standard	Effects
Electrostatic discharge ESD	EN 61000-4-2 8 kV air, 4 kV contact	No failure except radiometric types
High-frequency electromagnetic radiation (HF)	EN 6100-4-3 3 V/m, 80...1000 MHz	No effect up to 3 V/m
Conducted HF interference	EN 61000-4-6 3 V, 0.15 ... 80 MHz	No effect
Fast transients (burst)	EN 61000-4-4 1 kV	No effect
Surge	EN-61000-4-5 max. tolerable cable length 10 m	No test
Magnetic fields	EN 61000-4-8 30 A/m, 50 Hz	No effect
Type of interference/Emitted interference	Test standard	Effects
Conducted interference	EN 55022 (CISPR 22) 0.15...30 MHz	No effect
Radiation from housing	30...1000 MHz, 10 meters	No effect

Internet: www.hubacontrol.com

Huba Control Switzerland
 Headquarters
 Industriestrasse 17
 CH-5436 Würenlos
 Phone ++41 (0) 56 436 82 00
 Fax ++41 (0) 56 436 82 82
 e-mail: info.ch@hubacontrol.com

Huba Control United Kingdom
 Unit 3 Network Point
 Range Road
 GB-Witney Oxfordshire OX29 0YD
 Phone 01 993 776 667
 Fax 01 993 776 671
 e-mail: info.uk@hubacontrol.com

Huba Control France
 e-mail: info.fr@hubacontrol.com
Huba Control Germany
 e-mail: info.de@hubacontrol.com
Huba Control Netherlands
 e-mail: info.nl@hubacontrol.com

Agent for: